
PRELIMINARY DETAIL NOT FOR FINAL CONSTRUCTION

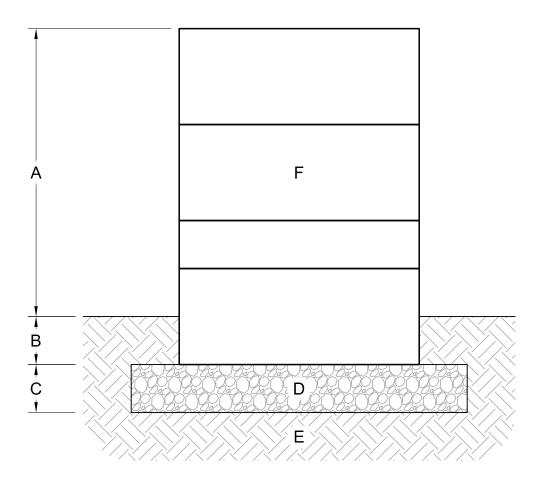

TYPICAL FREESTANDING WALL

(NO SCALE)

- A. Wall height above grade (varies, max 36 in.)
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. Crushed stone leveling pad
- E. Foundation soil compacted to 95% max. dry density
- F. Freestanding Outcropping wall blocks

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY: BOB/CARISSA	TITLE:	
APPROVED BY:	OUTCROPPING TYPICAL FREESTANDING WALL	HIGH FORMAT*
DATE: 4/1/2024	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	05481 US 31 SOUTH, CHARLEVOIX, MI 49720
SHEET NO.: 1 OF 1	DRAWING TITLE: Outcropping Typical Details [rev 2024].dwg	877-777-6558 • highformat.com