


PRELIMINARY DETAIL
 NOT FOR FINAL CONSTRUCTION

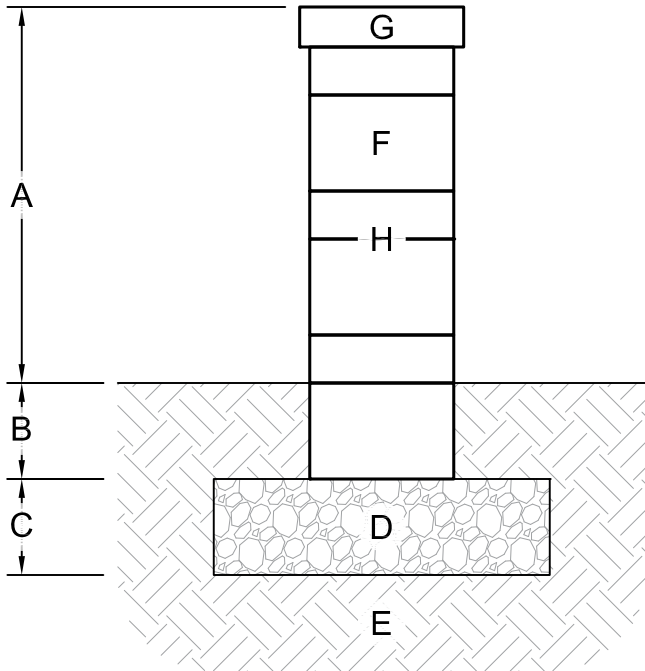

TYPICAL FREESTANDING SECTION
 (NO SCALE)

- A. Wall height above grade (varies by design, max. 24")
- B. Wall buried beneath grade (varies by design, min. 6")
- C. Leveling pad depth (varies by design, min. 6")
- D. Crushed stone leveling pad
- E. Foundation soil compacted to 95% max. dry density
- F. Belvedere wall blocks
- G. Cap block
- H. Concrete adhesive required between all blocks and caps

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY:	BOB/CARISSA
APPROVED BY:	
DATE:	4/1/2024
SHEET NO.:	1 OF 1

TITLE:	BELVEDERE TYPICAL FREESTANDING WALL DETAILS
DRAWING TITLE:	



**HIGH
FORMAT®**

05481 US 31 SOUTH, CHARLEVOIX, MI 49720
 877-777-6558 • highformat.com