




PRELIMINARY DETAIL
NOT FOR FINAL CONSTRUCTION

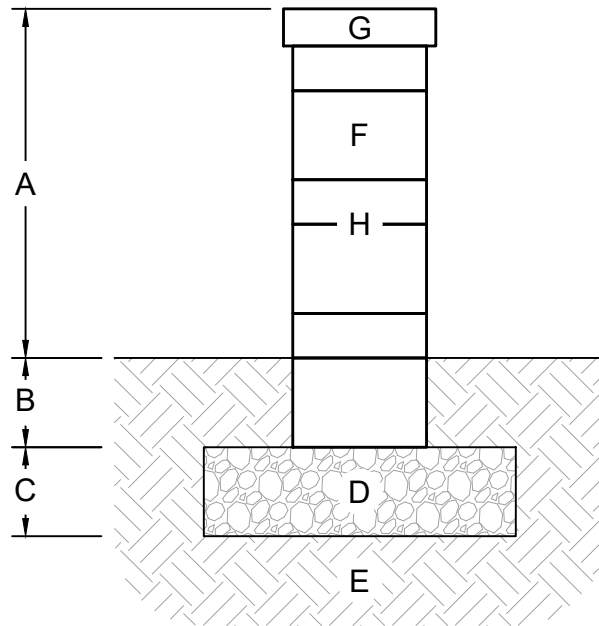

TYPICAL FREESTANDING SECTION
(NO SCALE)

- A. Wall height above grade (max. 24")
- B. Wall buried beneath grade (min. 6")
- C. Leveling pad depth (min. 6")
- D. Crushed stone leveling pad
- E. Foundation soil compacted to 95% max. dry density
- F. Wall blocks
- G. Cap block
- H. Concrete adhesive required between all blocks and caps

This drawing is for reference only. Determination of the suitability and/or manner of use of any details contained in this document is the sole responsibility of the design engineer of record. Final project designs, including all construction details, shall be prepared by a licensed professional engineer using the actual conditions of the proposed site.

DRAWN BY: BOB/CARISSA	TITLE:	 BELVEDERE TYPICAL FREESTANDING WALL	 HIGH FORMAT ®
APPROVED BY:			
DATE: 11/15/2021			
SHEET NO.: 1 OF 1	DRAWING TITLE: Belvedere Typical Cross Section.dwg		